

(19) World Intellectual Property
Organization
International Bureau



535, 610
Rec'd PCT/PTO 19 MAY 2005



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048678 A1

(51) International Patent Classification⁷: **D06M 23/12**,
17/00, B01J 13/02, C09J 7/04, A41D 31/00, A61K 7/00

SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:
PCT/IB2003/005309

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date:
10 November 2003 (10.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/428,461 22 November 2002 (22.11.2002) US

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

(71) Applicant (*for all designated States except US*): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): MARMAROPOULOS, George [US/US]; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

(74) Common Representative: KONINKLIJKE PHILIPS ELECTRONICS N.V.; c/o Waxler, Aaron, P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,

Published:

— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLEXIBLE MATERIAL INCLUDING CONTROLLED SUBSTANCE RELEASE

(57) **Abstract:** A flexible material allows for the controlled release of a microencapsulated substance. One element of the material is interwoven fibers. A second element is means for passing a current and generating localized heating interspersed among the fibers. A third element is at least one microcapsule, situated on or within the interwoven fibers and means for passing a current, containing a substance and releasing said substance upon rupture due to localized heating generated by selectively heating the means for passing a current. A fourth element is a means for controlling the current passed through the means for passing a current to enable controlled localized heating.

WO 2004/048678 A1

FLEXIBLE MATERIAL INCLUDING CONTROLLED SUBSTANCE RELEASE

The invention relates to wearable electronics and the controlled release of substances.

5 Microencapsulation technology involves encapsulating small amounts of substance, such as perfume, in plastic, gelatin, or polymer spheres that are a few microns in diameter. The spheres release the substance upon rupturing. Rupturing occurs either mechanically (i.e. by
10 scratching with a fingernail or pulling apart adhesives on either side of the spheres), chemically (i.e., by dissolving the spheres in a solvent to enable release of the substance), or thermally (i.e., by heating the spheres with an external source above their melting points to initiate rupturing). A
15 variety of substances can be encapsulated in microcapsules. As an example, the substance can be a fragrance, a dye, a lotion, or oil. Substances can be contained in microcapsules for as long as several years.

Conventionally, use of microcapsules has been limited to
20 scent inserts in magazines and commercially available "scratch-and-sniff" merchandise, both of which are relatively inflexible.

United States patent number 4,990,392 (the "'392 patent"), herein incorporated by reference, describes a
25 textile product that includes microcapsules applied to the

fabric using thermo-adhesive materials. The '392 patent describes adding microcapsules containing substances to a textile such that the microcapsules will withstand washing and other normal uses of the textile. The microcapsules
5 rupture during ordinary use of the textile either due to a rise in temperature or an increase in pressure. However, the release of substances contained in the microcapsules cannot be selectively controlled.

Fabrics including conductive fibers are also
10 commonly known in the art. Such fabrics include fibers interwoven with textile fibers to create circuits. Current can be selectively passed to an area on such fabric using a switch and a power source. Fig. 1 depicts a garment 2 that includes conductive fibers. Garment 2 has three current
15 paths 3, 3', 3" that are made up of conductive fibers through which current can be passed from power source 4. Current paths can also be formed using other known techniques such as conductive ink. Garment 2 also includes a switch 5 that the wearer of the garment can select which current path he or she
20 chooses. For example, a user can attach a portable electronic device, such as a cellular telephone or portable radio, to garment 2 at clip 6. When the wearer sets switch 5 to power the electronic device, current passes from power source 4 through current path 3" to clip 6 and into the
25 attached device. The conductive fibers that make up current

paths 3, 3', and 3" can also be selected to have a high resistance. Consequently, they act as resistors and release electrical energy as heat. Current paths 3, 3', and 3" can be used to heat garment 2 in selected areas. However, these
5 fabrics are not used to selectively control the release of a substance from within the fabric itself.

Accordingly, it would be desirable for a flexible fabric to include a means for selectively controlling the release of a substance that does not suffer from the prior art
10 limitations.

A flexible material including several elements meets the need for a flexible material that allows for the controlled release of a microencapsulated substance in one aspect. One element is interwoven fibers. A second element
15 is means for passing a current and generating localized heating interspersed among the fibers. A third element is at least one microcapsule, situated on or within the interwoven fibers and means for passing a current, containing a substance and releasing said substance upon rupture due to
20 localized heating generated by selectively heating the means for passing a current. A fourth element is a means for controlling the current passed through the means for passing a current to enable controlled localized heating.

In one embodiment, the means for passing a current and
25 generating localized heating is conductive fibers. In

another embodiment, the means for passing a current and generating localized heating is conductive ink.

In yet another embodiment, the at least one microcapsule further comprises a thermo-plastic polymer. In another
5 embodiment, the thermo-plastic polymer forms the at least one microcapsule containing the substance to be released.

In yet another embodiment, the at least one microcapsule releases the substance upon reaching its melting point. In another embodiment, the substance has a lower vapor point
10 than the melting point of the at least one microcapsule.

In yet another embodiment, the substance is an oil, liquid, or solid material. In another embodiment, the substance generates a scent upon release into the ambient environment.

15 In still another embodiment, the means for controlling the current includes a power source and a current path selector. In another embodiment, the means for controlling the current further includes at least one programmable sensor which determines when to activate and
20 deactivate the means for passing a current. In another embodiment, the at least one programmable sensor senses when a predetermined number of microcapsules have ruptured. The means for controlling the current can also include a timer. In one embodiment the timer determines when to deactivate the
25 means for passing a current based upon the melting point of

the at least one microcapsule, the number of microcapsules, and the material properties of the substance contained in the at least one microcapsule.

In another embodiment, the flexible material includes
5 multiple microcapsules a first portion of which contain a first substance and a second portion of which contain a second substance. In another embodiment, the first substance and the second substance have different material properties. The different material properties can be scent, melting
10 point, viscosity, physical state, color, flavor, chemical composition, and texture. In another embodiment, the first portion of microcapsules containing the first substance are grouped on or within an area of the flexible material such that the means for controlling the current locally heats the
15 area and enables the release of the first substance. In another embodiment, the means for controlling the current allows local heating of either the first or the second portion of microcapsules and controllably enables the release of the first or second substance.

20 In still another embodiment, the means for controlling the current allows local heating of both the first and the second portion of microcapsules and controllably enables the release of a portion of the first and second substances.

In another embodiment, the first portion of microcapsules has a different melting point than the second portion of microcapsules.

In another embodiment, the means for controlling the
5 current includes means for locally heating the first and second portion of microcapsules such that only the first portion of microcapsules rupture and release the substance they contain.

In one aspect a flexible material includes interwoven
10 fibers; means for passing a current and generating localized heating interspersed among the fibers; at least one substance, situated on or within the fibers and means for passing a current, that vaporizes due to localized heating generated by selectively heating the means for passing a
15 current; and means for controlling the current passed through the means for generating localized heating.

In another aspect of the invention, a method of controllably releasing a substance contained in a flexible material includes several steps. One step is integrating
20 fibers and means for passing a current and generating localized heating interspersed among the textile fibers. Another step is forming at least one microcapsule containing a substance. Another step is incorporating the at least one microcapsule above or within the integrated fibers and means
25 for passing a current. Another step is selectively heating

the at least one microcapsule. Another step is rupturing the at least one microcapsule, and another step is releasing the substance.

In another aspect of the invention, a method of
5 controllably releasing a substance contained in a flexible material includes integrating fibers and means for passing a current and generating localized heating interspersed among the textile fibers; forming a substance above or within the interwoven textile fibers and means for passing a current;
10 selectively heating the substance; and evaporating the substance.

The invention provides many advantages that are evident from the following description, drawings, and claims.

The invention may be more completely understood in
15 reference to the following figures:

Fig. 1 depicts a prior art garment including conductive fibers;

Fig. 2 depicts a cross section of a flexible material including conductive fibers and microencapsulated
20 substances;

Fig. 3 depicts a garment including conductive fibers and multiple zones of microencapsulated substances;

Fig. 4 depicts a cross section of an area on a flexible conductive material with microencapsulated substances in
25 separate zones on its surface; and

Fig. 5 depicts another embodiment of a flexible conductive material with microencapsulated substances in separate zones on its surface.

5 Fig. 2 depicts a cross section of a flexible material including conductive fibers and microencapsulated substances. The flexible material includes conductive fibers 23 made of a conductive material and woven into textile fiber layers 20. Conductive fibers 23 are covered on both sides by insulating
10 layers 22 which prevent microcapsule layers 21a and 21b from overheating or heating too quickly. Layers 21a and 21b are composed of microcapsules containing a substance, for example perfume. When current is passed through conductive fibers
15 23, they act as resistors and give off a fixed amount of heat. This heats insulating layers 22 and microcapsule layers 21a and 21b. As individual microcapsules begin to heat, the perfume they contain reaches its vapor point. As individual microcapsules reach their melting points, they rupture and release the vaporized perfume.

20 Insulating layers 22 can be selected to ensure that only a limited amount of heat will reach the microcapsules so that a limited number of microcapsules will break each time a user passes a current through conductive fibers 23. This allows the flexible material to be used multiple times since only a
25 few microcapsules are broken during each usage. The

insulating layers can also exist as coatings surrounding
conductive fibers 23. Additionally, the amount of current
passed through conductive fibers 23 can also be set to
achieve the desired amount of microcapsule breakage. The
5 desired number of microcapsules to be broken during a single
usage depends upon the material properties of the substances
they contain. For example, if the microcapsules contain a
concentrated strong fragrance, only a few need be broken in a
single use.

10 In Fig. 2, microcapsule layers 21a and 21b can also be
composed of microcapsules containing different substances.
For exemplary purposes, assume that the flexible material is
part of a garment. As such, layer 21a is closer to the
ambient environment and layer 21b is closer to the skin of
15 the wearer. The microcapsules in layer 21a can contain
perfume, since the substance of perfume should have
sufficient exposure to the ambient environment. The
microcapsules in layer 21b can contain skin lotion, since the
release of lotion should occur closer to the wearer's skin.

20 Fig. 3 depicts a garment 2 made of a flexible material
that includes conductive fibers and multiple zones of
microencapsulated substances. Here a user can set controller
50 to either activate zones 30, zone 31 or to power device
clip 6 from power source 4. Zones 30 contain, for example,
25 microencapsulated deodorizing antiperspirant. Since these

zones are situated in proximity to a user's armpits, the user can activate these zones such that the microcapsules therein are ruptured and provide for the release of deodorizing antiperspirant. In addition, zones 30 can contain sensors
5 which signal controller 50 to generate current in zones 30 when they sense deodorizing or perspiring occurs. The sensors can also dictate when controller 50 should deactivate zones 30, i.e., when a certain amount of microcapsules have ruptured, or when the sensors no longer detect order or
10 perspiring. Further, controller 50 can also be programmed to shut off current to zones 30 automatically after a preset period of time determined by the melting point and/or the number of microcapsules in zone 30. The sensors can be any type of biosensor, chemical sensor, or mechanical sensor
15 known in the art.

Zone 31 contains, for example, at least one fragrance. If the wearer of garment 2 wishes to alter the scent of the ambient environment, he or she can set controller 50 to activate zone 31. Activation will pass current from power
20 source 4 through current path 3'' to zone 31. The conductive fibers in zone 31 heat up such that a portion of the microcapsules in zone 31 rupture and release fragrance. Controller 50 can automatically shut off current to zone 31 after a preset period of time based on the melting point of
25 the microcapsules in zone 31 as well as the material

properties of the substance contained in the microcapsules. For example, controller 50 can be programmed to generate current for 30 seconds to zone 31 because the rate at which the microcapsules in zone 30 rupture would release ample
5 fragrance to comfortably alter the user's immediate environment in that period of time. Further, a user can manually set controller 50 based on their own personal preference.

Garment 2 is manufactured such that the microcapsules
10 and conductive fibers in zones 30 and 31, as well as conductive fibers in current paths 30, 30', 30'', and 30''' can be washed with other garments without breaking any microcapsules or affecting any conductive fibers. In addition, garment 2 can include enough microcapsules in a
15 given zone to allow for a certain number of uses. As an example, zone 31 can contain enough microcapsules that the fragrance contained therein can be released 600 times at 30 seconds of current per activation. Thus, garment 2 has a defined useful life determined based upon the number of
20 microcapsules in an area, the rate at which they rupture, the amount of time they are heated, and the melting point of the microcapsules. A further advantage is that even when garment 2 achieves its useful life in terms of zones 30 and 31, it can still be worn as a garment. Further, Garment 2 can still
25 support portable electronic devices by passing current from

power source 4 through current path 3" to clip 6 onto which a device can be attached and powered. Garment 2 can be any type of garment worn by a user and is not limited to the shirt depicted in Fig. 3. Further, any type of flexible material can include zones such as zones 30 and 31.

Fig. 4 depicts a cross section of a layer of flexible material, for example, zone 31. In Fig. 4, strips of different microencapsulated substances 42, 43, 44 are deposited above conductive areas 40. As an example, a user can set controller 50 to generate a fragrance that is composed of 2 parts substance 44 and one part substance 42. Controller 50 passes current through current paths that heat up the conductive fabric areas 40 under strips corresponding to microencapsulated substances 42, 44, 44. Insulators 41 prevent adjoining strips from being heated. Thus within a given zone, multiple substances can be simultaneously and controllably released.

Controller 50 can be programmed with the relative proportions of each strip needed to produce a given result, such as a given coloration or fragrance. Thus, when a user selects the given coloration or fragrance, controller 50 will automatically pass current from power source 4 through the appropriate current path to heat the appropriate conductive areas 40 to cause the requisite proportions of substance to be released due to microcapsule rupture.

In addition, strips corresponding to substances 42, 43, 44 can be formed from microcapsules with different melting points for each different substance 42, 43, 44. Thus, conductive areas 40 can all be heated simultaneously and
5 based on the different melting points of the microcapsules, different proportion of substances 42, 43, 44 can be released.

Depositing substance directly onto zone 31 can also form strips corresponding to substances 42, 43, 44. In other
10 words, conductive areas 40 can selectively heat substances 42, 43, 44 to either liquefy, evaporate, or sublime and cause the same result as if substances 42, 43, 44 were microencapsulated.

Fig. 5 depicts a matrix arrangement of zone 31, whereby
15 controller 50 can selectively activate sub-zones 42, 43, 44 according to the user's desired effect. Each sub-zone 42, 43, 44 is independently controllable such that controller 50 can pass current from power source 4 through a current path to a conductive area 40 below a given sub-zone and heat only
20 the desired sub-zone.

The preceding expressions and examples are exemplary and are not intended to limit the scope of the claims which follow.

CLAIMS:

1. A flexible material comprising:
 - interwoven fibers (20);
 - means for passing a current (23) and generating localized heating interspersed among the fibers (20);
 - at least one microcapsule, situated on or within the interwoven fibers (20) and means for passing a current (23), containing a substance and releasing said substance upon rupture due to localized heating generated by selectively heating the means for passing a current (23);
 - and
 - means for controlling the current (5) passed through the means for passing a current (23) to enable controlled localized heating.
2. The flexible material of Claim 1, wherein the means for passing a current (23) and generating localized heating further comprises conductive fibers.
3. The flexible material of Claim 1, wherein the means for passing a current (23) and generating localized heating further comprises conductive ink.

4. The flexible material of Claim 1, wherein the at least one microcapsule further comprises a thermo-plastic polymer.
5. The flexible material of Claim 4, wherein the thermo-plastic polymer forms the at least one microcapsule containing the substance to be released.
6. The flexible material of Claim 1, wherein the at least one microcapsule releases the substance upon reaching its melting point.
7. The flexible material of Claim 6, wherein the substance has a lower vapor point than the melting point of the at least one microcapsule.
8. The flexible material of Claim 1, wherein the substance consists of at least one of oil, liquid, and solid material.
9. The flexible material of Claim 1, wherein the substance generates a scent upon release into the ambient environment.

10. The flexible material of Claim 1, wherein the means for controlling the current (5) further comprises a power source (4), and a current path selector (5).
11. The flexible material of Claim 10, wherein the means for controlling the current (5) further comprises at least one programmable sensor which determines when to activate and deactivate the means for passing a current.
12. The flexible material of Claim 11, wherein the at least one programmable sensor senses when a predetermined number of microcapsules have ruptured.
13. The flexible material of Claim 10, wherein the means for controlling the current further comprises a timer.
14. The flexible material of Claim 13, wherein the timer determines when to deactivate the means for passing a current (23) based upon the melting point of the at least one microcapsule, the number of microcapsules, and the material properties of the substance contained in the at least one microcapsule.

15. The flexible material of Claim 1 further comprising multiple microcapsules wherein a first portion (42) of the microcapsules contain a first substance and a second portion (43) of the microcapsules contain a second substance.

16. The flexible material of Claim 15, wherein the first substance and the second substance have different material properties.

17. The flexible material of Claim 16, wherein the different material properties consist of at least one of scent, melting-point, viscosity, physical state, color, flavor, chemical composition, and texture.

18. The flexible material of Claim 15, wherein the first portion of microcapsules (42) containing the first substance are grouped on or within an area of the flexible material such that the means for controlling the current locally heats the area and enables the release of the first substance.

19. The flexible material of Claim 16, wherein the means for controlling the current (5) allows local heating of either the first (42) or the second (43) portion of microcapsules and controllably enables the release of the first or second substance.

20. The flexible material of Claim 16, wherein the means for controlling the current (5) allows local heating of both the first (42) and the second (43) portion of microcapsules and controllably enables the release of a portion of the first and second substances.

21. The flexible material of Claim 15, wherein the first portion of microcapsules (42) has a different melting point than the second portion (43) of microcapsules.

22. The flexible material of Claim 21, wherein the means for controlling the current (5) further comprises means for locally heating the first (42) and second (43) portion of microcapsules such that only the first portion (42) of microcapsules rupture and release the substance they contain.

23. A flexible material comprising:

interwoven fibers (20);

means for passing a current (23) and generating localized heating interspersed among the fibers (20);

at least one substance, situated on or within the fibers and means for passing a current, that vaporizes due to localized heating generated by selectively heating the means for passing a current (23); and

means for controlling the current (5) passed through the means for generating localized heating.

24. A method of controllably releasing a substance contained in a flexible material comprising:

integrating fibers (20) and means for passing a current (23) and generating localized heating interspersed among the fibers (20);

forming at least one microcapsule containing a substance;

incorporating the at least one microcapsule above or within the integrated fibers (20) and means for passing a current (23);

selectively heating the at least one microcapsule;

rupturing the at least one microcapsule; and

releasing said substance.

25. A method of controllably releasing a substance contained in a flexible material comprising:

integrating fibers (20) and means for passing a current (23) and generating localized heating interspersed among the fibers (20);

forming a substance above or within the integrated fibers (20) and means for passing a current (23);

selectively heating the substance; and
evaporating said substance.

1/4

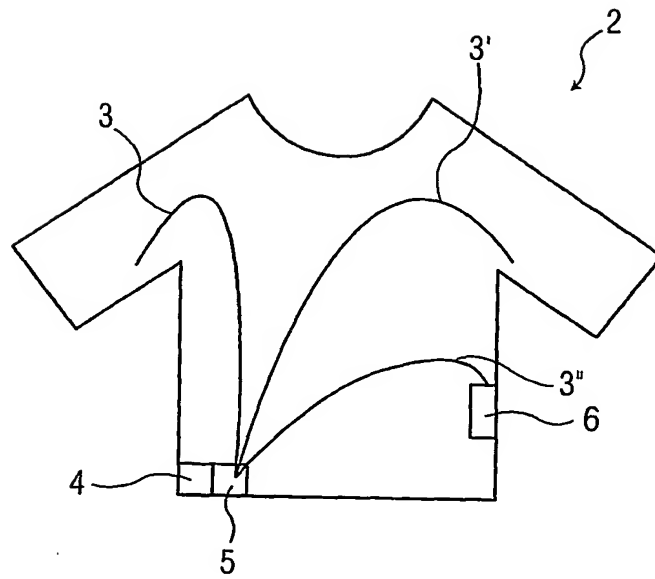


FIG. 1
PRIOR ART

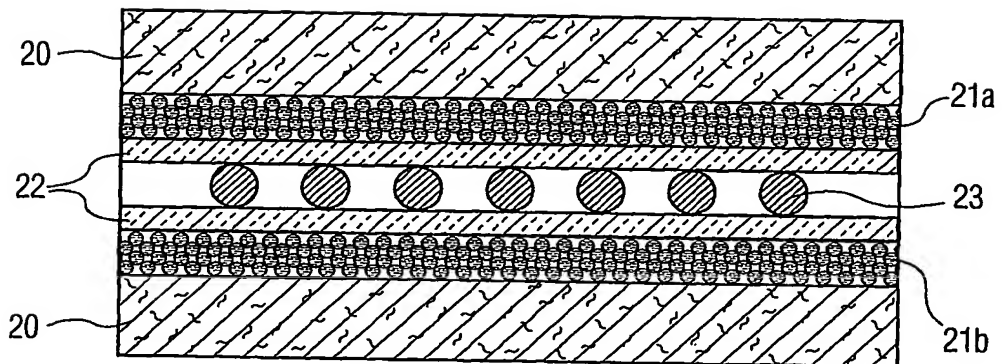


FIG. 2

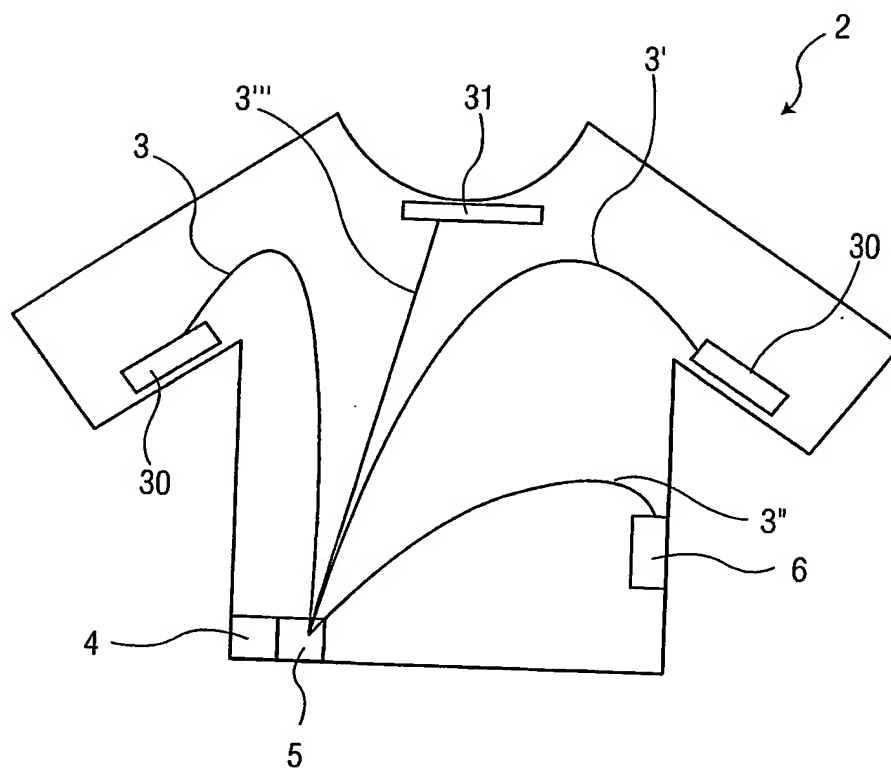


FIG. 3

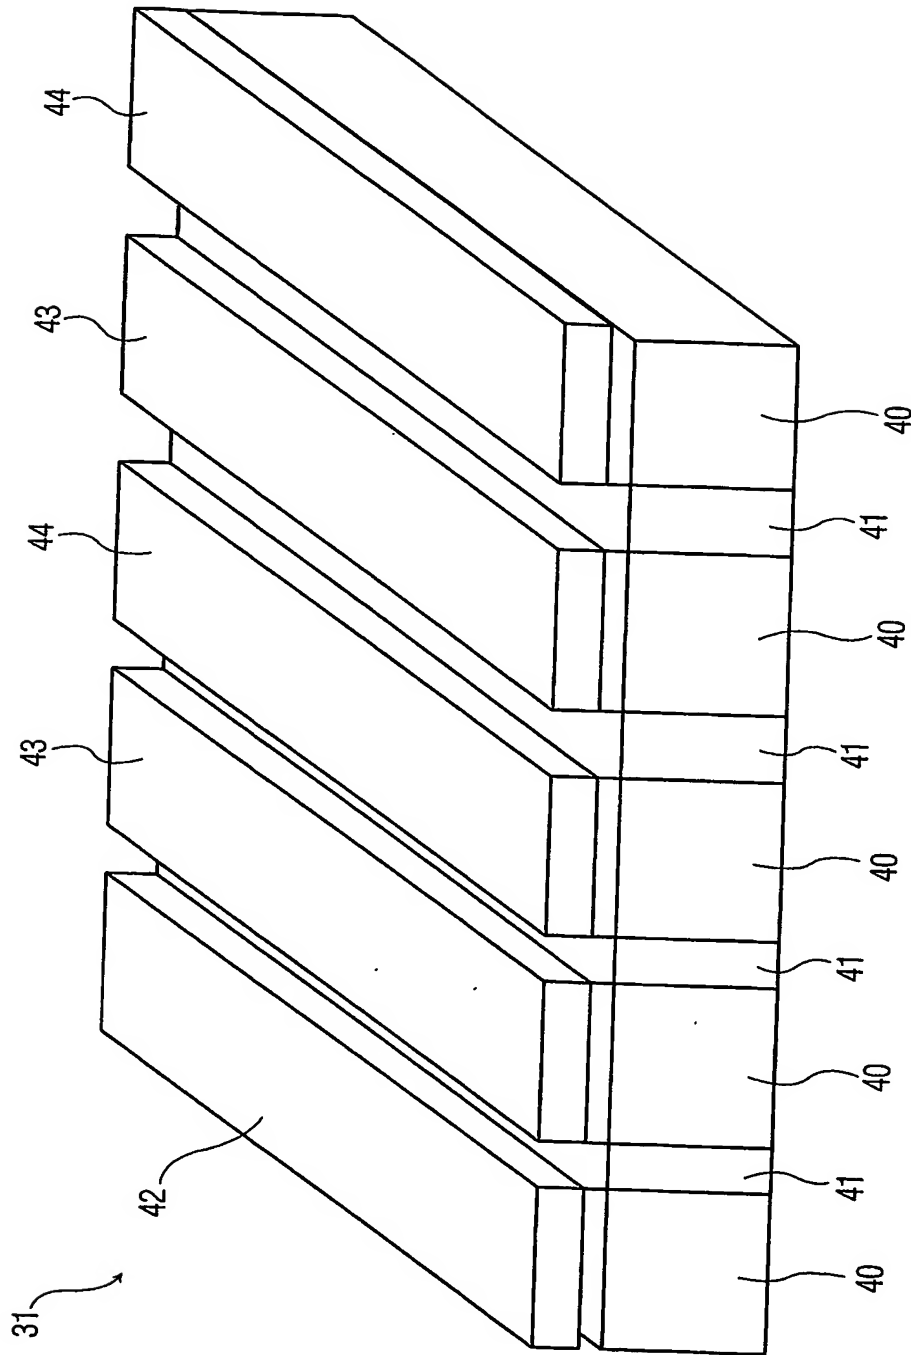


FIG. 4

31

<u>42</u>	<u>43</u>	<u>44</u>	<u>42</u>
<u>42</u>	<u>43</u>	<u>44</u>	<u>44</u>
<u>42</u>	<u>44</u>	<u>42</u>	
<u>43</u>	<u>43</u>	<u>43</u>	<u>44</u>

FIG. 5

INTERNATIONAL SEARCH REPORT

PCT/IB03/05309

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D06M23/12 D06M17/00 B01J13/02 C09J7/04 A41D31/00
A61K7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D06M B01J C09J A41D A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 480 162 A (MATSUI SHIKISO KAGAKU KOGYOSH0) 15 April 1992 (1992-04-15) page 2, line 27-39; claim 1 page 5, line 55 -page 7, line 7 ---	1-25
A	EP 0 328 937 A (KANEBO LTD) 23 August 1989 (1989-08-23) page 2 -page 3; claims 1,12-19; example 1 ---	1-25
A	US 4 514 461 A (WOO YEN-KONG) 30 April 1985 (1985-04-30) claim 1 ---	1-25
A	EP 1 054 095 A (DEOTEXIS INC) 22 November 2000 (2000-11-22) page 8 -page 14 ---	1-25
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 April 2004

Date of mailing of the international search report

28/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kardas-Llorens, E

INTERNATIONAL SEARCH REPORT

PCT/IB03/05309

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	"Fiber cloth for dress shirt, underwear or leg knitted fabric, includes microcapsules which comprise organic resin as wall material and contain mentha oil and/or 1-menthol" DERWENT, XP002219312 Abstract	1-25
A	NELSON G: "MICROENCAPSULATES IN TEXTILE COLORATION AND FINISHING" REVIEW OF PROGRESS IN COLORATION & RELATED TOPICS, SOCIETY OF DYERS AND COLOURISTS. BRADFORD, GB, vol. 21, 1991, pages 72-85, XP000225719 ISSN: 0557-9325 page 8 -page 14	1-25

INTERNATIONAL SEARCH REPORT

PCT/IB03/05309

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0480162	A	15-04-1992	AU 642529 B2	21-10-1993
			AU 8450091 A	16-04-1992
			BR 9104373 A	09-06-1992
			CA 2051000 A1	10-04-1992
			CN 1061252 A	20-05-1992
			CS 9103074 A3	15-04-1992
			DE 480162 T1	24-09-1992
			EP 0480162 A1	15-04-1992
			ES 2044826 T1	16-01-1994
			FI 914630 A	10-04-1992
			GR 92300086 T1	30-12-1992
			IE 921113 A1	18-11-1992
			JP 5033276 A	09-02-1993
			JP 7049631 B	31-05-1995
			MX 9101406 A1	31-05-1994
			NO 913817 A	10-04-1992
			NZ 239231 A	26-07-1994
			PL 291958 A1	27-07-1992
			PT 99173 A	30-09-1992
			TR 26137 A	15-02-1995
			US 5221288 A	22-06-1993
EP 0328937	A	23-08-1989	JP 1201501 A	14-08-1989
			JP 1793344 C	14-10-1993
			JP 4080121 B	17-12-1992
			JP 1260066 A	17-10-1989
			JP 1280080 A	10-11-1989
			JP 1292183 A	24-11-1989
			JP 2006671 A	10-01-1990
			JP 2006672 A	10-01-1990
			JP 2023542 C	26-02-1996
			JP 2041477 A	09-02-1990
			JP 7049628 B	31-05-1995
			EP 0328937 A2	23-08-1989
			US 4882220 A	21-11-1989
			US 4917920 A	17-04-1990
US 4514461	A	30-04-1985	US RE32713 E	12-07-1988
EP 1054095	A	22-11-2000	DE 19923575 C1	22-03-2001
			EP 1054095 A2	22-11-2000